


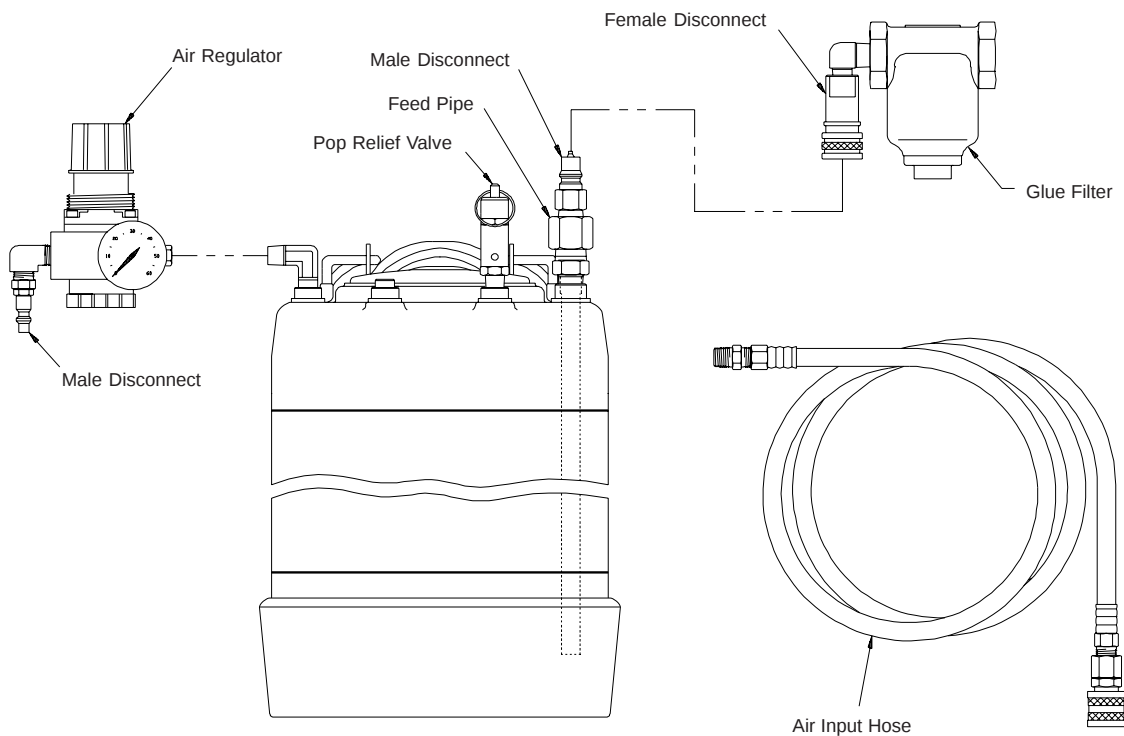

Valco Cincinnati offers a range of standard tanks, including 1-gallon, 3-gallon, 5-gallon, and 10-gallon sizes. All tanks are A.S.M.E. certified and available complete with stainless-steel, in-line glue filter, air pressure regulator, feed pipe, air input hose, pop safety valve, and quick-disconnects for air and glue lines.

1-GALLON, STAINLESS-STEEL TANKS

Diameter:	9.22 in. (234 mm)
Height:	8.38 in. (213 mm)
558xx106	1-gallon, stainless-steel tank assembly, 0–30 psi
558xx107	1-gallon, stainless-steel tank assembly, 0–60 psi
558xx108	1-gallon, stainless-steel tank assembly, 0–125 psi

3-GALLON, STAINLESS-STEEL TANKS - CE

Diameter:	9.22 in. (234 mm)
Height:	13.19 in. (419 mm)
558xx327	3-gallon, stainless-steel tank assembly, 0–30 psi
558xx878	3-gallon, stainless-steel tank assembly, 0–60 psi
558xx877	3-gallon, stainless-steel tank assembly, 0–125 psi

5-GALLON, STAINLESS-STEEL TANKS - CE

Diameter:	9.22 in. (234 mm)
Height:	22.38 in. (568 mm)
558xx527	5-gallon, stainless-steel tank assembly, 0–30 psi
558xx880	5-gallon, stainless-steel tank assembly, 0–60 psi
558xx881	5-gallon, stainless-steel tank assembly, 0–125 psi

10-GALLON, STAINLESS-STEEL TANKS - CE

Diameter:	9.22 in. (234 mm)
Height:	25 in. (635 mm)
558xx222	10-gallon, stainless-steel tank assembly, 0–30 psi
558xx883	10-gallon, stainless-steel tank assembly, 0–60 psi
558xx884	10-gallon, stainless-steel tank assembly, 0–125 psi


TANK COMPONENTS

558xx019	Tank lid
558xx910	Tank lid O-ring
558xx037	Feed pipe, 1-gallon tank
558xx964	Feed pipe, 3-gallon tank
558xx965	Feed pipe, 5-gallon tank
558xx963	Feed pipe, 10-gallon tank



Adhesive System Tank Assemblies

EPOXY-COATED, 5-GALLON PRESSURE VESSEL

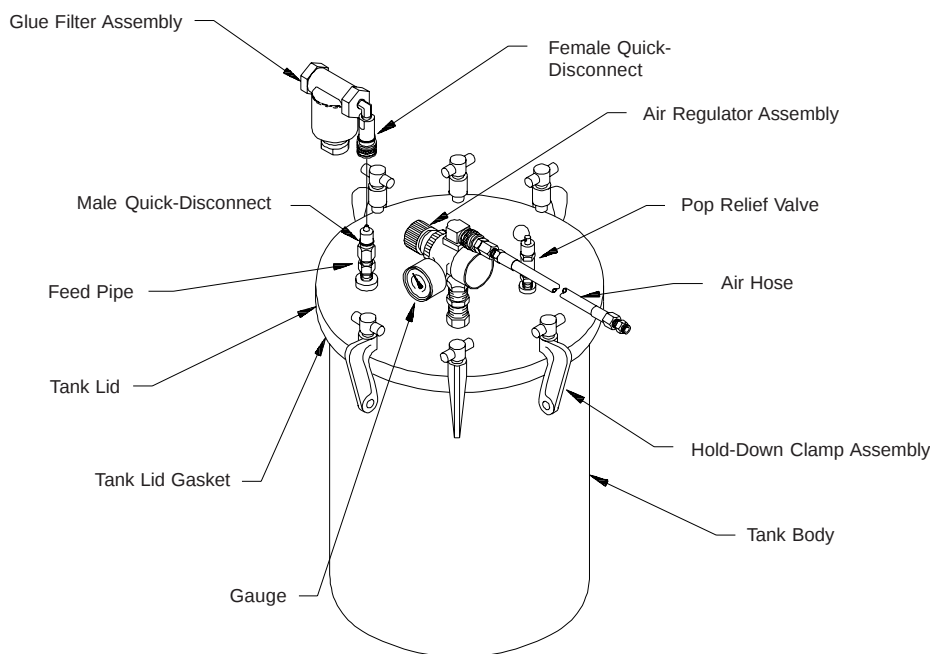

The 5-gallon pressure vessel features a full-diameter removable lid. It is designed so that a 5-gallon pail of adhesive can be placed inside the tank.

Diameter:	15 in. (381 mm)
Height:	21.6 in. (549 mm)
558xx505	5-gallon, epoxy-coated pressure vessel, 0–30 psi
558xx500	5-gallon, epoxy-coated pressure vessel, 0–60 psi
558xx515	5-gallon, epoxy-coated pressure vessel, 0–125 psi

TANK COMPONENTS

558xx501	5-gallon tank body/lid assy.
558xx503	5-gallon feed pipe
558xx510	Clamp assembly for tank lid
745xx063	Gasket for tank lid

TANK ASSEMBLY COMPONENTS

The following components are common to all standard Valco Cincinnati tank assemblies:

593xx024	50-mesh, in-line glue filter
593xx020	Replacement screen for above
593xx088	100-mesh, in-line glue filter
593xx087	Replacement screen for above
745xx059	Replacement gasket, in-line filter
703xx003	Pop safety valve, 75 psi, A.S.M.E. rated
703xx027	Pop safety valve, 125 psi, A.S.M.E. rated
594xx094	Air pressure regulator, 0–30 psi
594xx026	Repair kit for above
594xx086	Air pressure regulator, 0–60 psi
594xx091	Repair kit for above
594xx005	Air pressure regulator, 0–125 psi
594xx026	Repair kit for above
786xx003	Pressure gauge, 0–30 psi
786xx001	Pressure gauge, 0–60 psi
786xx002	Pressure gauge, 0–160 psi
755xx012	Air input hose with quick-disconnect, 10 ft (3 m)
752xx002	Female quick-disconnect, air
752xx004	Male quick-disconnect, air
752xx001	Female quick-disconnect, glue (brass)
752xx003	Male quick-disconnect, glue (brass)
752xx007	Female quick-disconnect, glue (stainless steel)
752xx008	Male quick-disconnect, glue (stainless steel)

Design specifications subject to change without notice.

DS044

Tank Assemblies Data Sheet

7/2018

Valco Cincinnati Incorporated
411 Circle Freeway Drive
Cincinnati, Ohio 45246, USA
TEL: (1) 513-874-6550
FAX: (1) 513-874-3612

Melton S.L.U.
Pol. Industrial Agustinos
calle G, n. 34
31160 Orcoyen, Navarra, Spain
TEL: (34) 948-321-580
FAX: (34) 948-326-584

Valco Cincinnati, Ltd.
Unit 7-8
Hortonwood 32
Telford TF1 7YN England
TEL: (44) 1952-677911
FAX: (44) 1952-677945

Valco Cincinnati GmbH
Bonnerstrasse 349
40589 Dusseldorf-Benrath, Germany
Tel: +49 211 984 798-0
Fax: +49 211 984 798-20

Valco Melton France
Technoparc des Hautes Faventines
32 Rue Jean Bertin
26000 Valence
Tel: +33 (0)4 75 78 13 73
Fax: +33 (0)4 75 55 74 20